


**Product Description:**

The E6060™, E1230™ and E1260™ PRO range delivers an industry leading 110lm/W, producing over 60% energy savings compared to traditional fluorescent. A superior level of construction results in an IP44 rating as standard for damp environments.

**Product Image:**

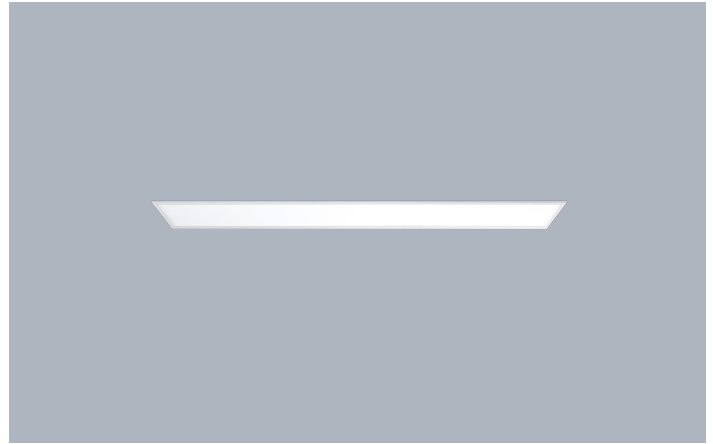


E1230™ PRO 1200mm x 300mm 30W LED Flat Panel


**Product Features:**

- Edge-lit design and optical pattern light guide engineered for even light distribution
- Suitable for installation in 15 & 24mm T-bar ceilings
- SDCM <4 providing consistent light colour quality
- IP44 rated from the front
- UGR 19 (Unified Glare Rating) - suitable for use in offices
- Flicker free driver - Power Factor >0.9
- 1-10V dimmable, DALI and emergency versions available
- Surface mount box, ceiling recess box and adjustable suspension kit available
- 1.5kV surge protection
- 5 year warranty

**Line Drawing Image**



**Polar Curve Image**



## Product Specs:

Technology	LED	Number of LEDs	180
Luminaire Distribution	Direct	Lifetime L70 (hrs)	50000
Input Voltage	220~240V AC	Input Frequency	50/60HZ
Dimmable	Yes	Dali	Yes
IP Rating	IP44	IK Rating	IK06
Operating Env. Temp. (Min) °C	-10	Operating Env. Temp. (Max) °C	40
Power Factor	0.9	Lamp Base	None
Height (mm)	10	Length (mm)	1195
Width (mm)	295	Surge Protection (kV)	1.5
SDCM	5		





## SKU Table and Ordering

SKU Code	Wattage	Lumens	Lumens/Watt	Colour	Beam Angle	Ra	SDCM
EN-FPRO1230/40	30	3300	110	4000	110	80	5
EN-FPRO1230/50	30	3300	110	5000	110	80	5
EN-FPRO1230DA/40	30	3300	110	4000	110	80	5
EN-FPRO1230DA/50	30	3300	110	5000	110	80	5
EN-FPRO1230V/40	30	3300	110	4000	110	80	5
EN-FPRO1230V/50	30	3300	110	5000	110	80	5

## Compliance & Approvals:



## Accessories:

SKU Image	SKU Code	Description
	EN-SM107B	1200 x 300 x 74mm Panel Surface Mount
	EN-SK100B	Panel Adjustable Suspension Kit
	EN-LPEM2	3 Hour Non-Maintained Emergency Pack for Enlite Panel Range
	EN-CRM1230A	1200 x 300mm Panel Recess Mount

## Warranty

This product has a warranty period of 5 Years. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

**UK Enlite Sales & Distribution**  
Apex Park  
6 Little Burrow  
Welwyn Garden City AL7 4SW  
United Kingdom  
Tel : +44 (0) 1707 35 18 20