



AGLED/3M

Guardian Bulkhead Maintained / Non-Maintained White



Features

Ultra-slim profile LED polycarbonate bulkhead

Supplied with self-adhesive legend

Self-test as standard

20mm side, end and rear cable entries

LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime

Quick release LED array/gear tray assembly provides the installer the means to faster installation/maintenance


Viewing distance 18 metres

General Information

Lamp Type	LED
Colour / Finish	White
Emergency	Yes
Self Test	Yes
IP Rating	IP65
IK Rating	IK08
Class Protection	2
Internal / External	Internal / External
Surface / Recessed / Suspended	Recessed, Surface
Lifetime (Hrs)	L70 B50 36,000h
Warranty (Years)	5
CE Mark	Yes
Length (mm)	352 mm
Width (mm)	110 mm
Depth (mm)	55 mm
Accessories	AGLED/KIT, ASBP/30/LI

Technical Information

Wattage	3W
Lumens Delivered	167lm (Emergency)
Beam Angle	130
CRI	80
CCT	6500K
Input	220/240V
Hertz	50/60Hz
Operating Temp	5°C to 40°C
SDCM	6

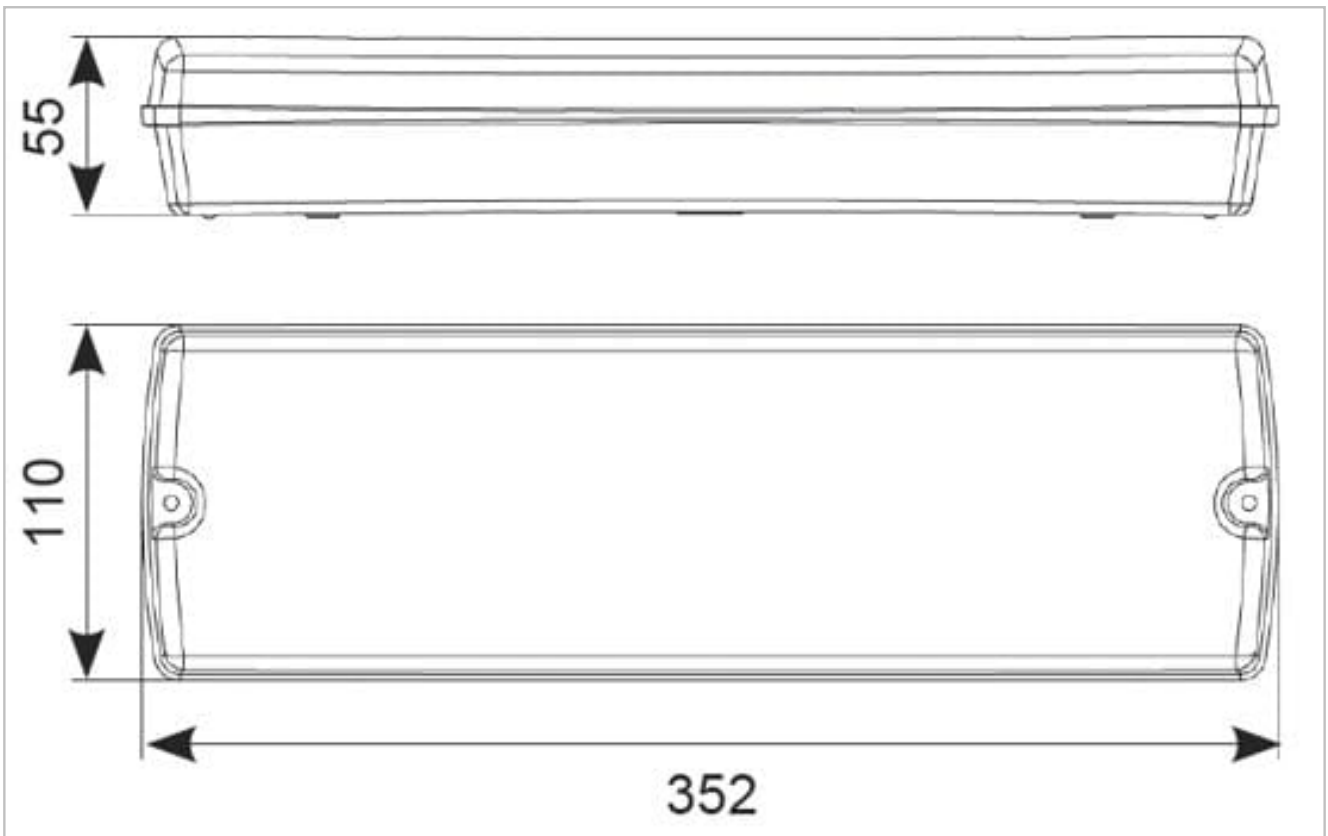

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:18 AM