



## AMOLED/LI/3M/ST

Monarch Bulkhead Maintained / Non-Maintained



## Features

Ultra-slim profile LED polycarbonate self-test bulkhead

LiFePO4 Lithium battery provides improved energy consumption, product reliability and lifetime

Supplied with self-adhesive legend

20mm side, end and rear cable entries

Hinged screwless gear tray for ease of installation


Viewing distance 18 metres

## General Information

Lamp Type	LED
Colour / Finish	White
Emergency	Yes
Self Test	Yes
IP Rating	IP65
IK Rating	IK10
Class Protection	2
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 54,000h
Warranty (Years)	6
CE Mark	Yes
Width (mm)	351 mm
Height (mm)	116 mm
Depth (mm)	58 mm
Accessories	ASBP/18

# Technical Information

Wattage	3W
Lumens Delivered	62lm (Emergency), 123lm (Standard)
Beam Angle	150
CRI	80
CCT	6000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	5°C to 40°C
SDCM	5

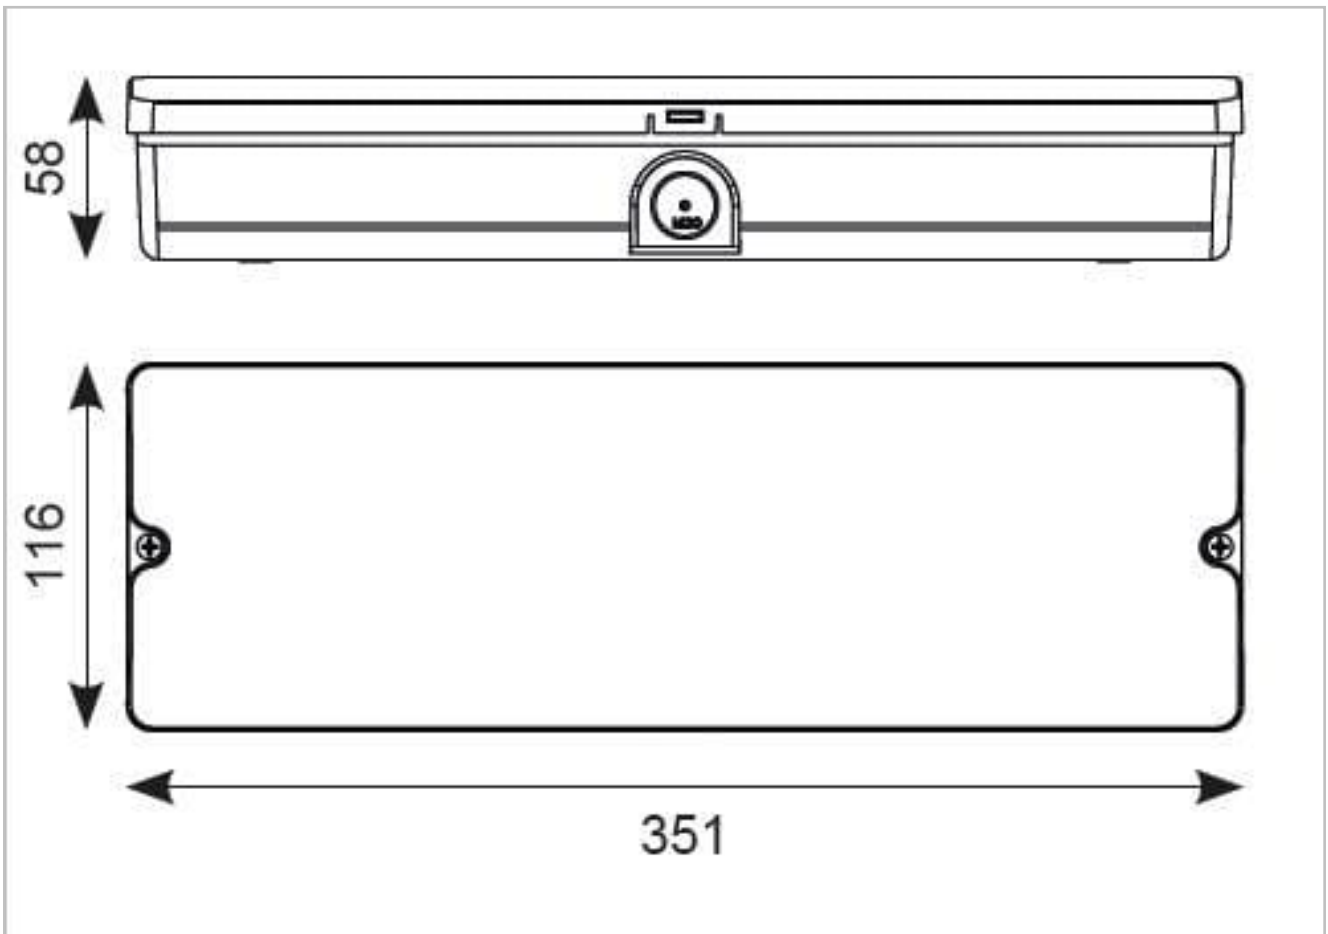

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:18 AM