

AZPELED/1/M3

Z LED Performance 1 Cool White Emergency



Features

Robust LED low/high bay for industrial, commercial and retail applications

Die-cast powder coated construction and heatsink for optimum thermals and performance

Alternative installation options by means of drop rods, jack chain and catenary wire

Additional lens options offer mid (85°) and narrow (55°) beam angles; ideal for racking aisles

Bracket accessories available for ceiling or wall mounting

Pre-wired with 3M of H07RN-F cable for ease and speed of installation

1-10V dimmable as standard

General Information



Lamp Type	LED
Colour / Finish	Black
Dimmable	Yes
Emergency	Yes
Bluetooth Enabled	Yes
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface,Suspended
Lifetime (Hrs)	L80 B10 54,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	308 mm
Height (mm)	181 mm
Accessories	AZPELED/FB1, AZPELED/REF

Technical Information

Wattage	100W
Lumens Delivered	15000lm
Lm/W	150lm/W
Beam Angle	110
CRI	80
CCT	4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-30°C to 45°C
SDCM	4

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 13, 2022 10:03:30 PM



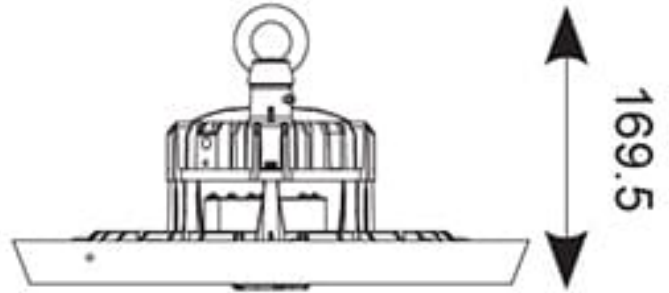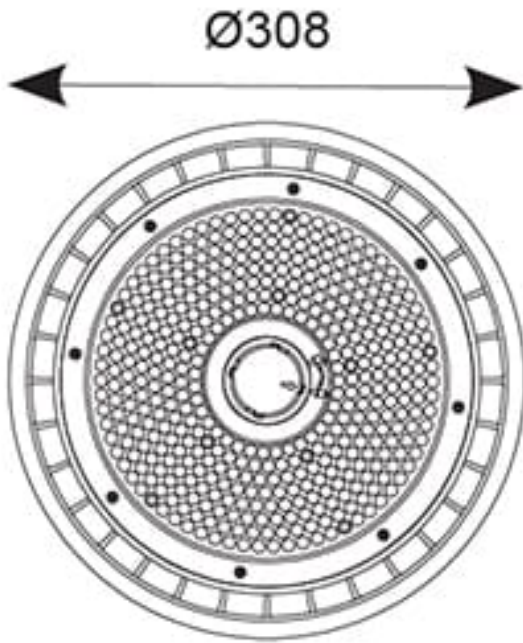

AZPELED/1