

## GU10 FIRE RATED DOWNLIGHTS

### Product Features

- Rapid and easy installation
- Loop in loop out terminals
- Polished Chrome, Brushed Steel & White finishes available
- GU10 lamp holder (lamp NOT included)
- Fully tested to 30, 60 and 90mins fire resistance




CAT NO.	TYPE	FINISH	CUTOUT
EFDGUFWH	Fixed	White	72
EFDGUFBS	Fixed	Brushed Steel	72
EFDGUFPC	Fixed	Polished Chrome	72
EFDGUIPWH	IP65	White	72
EFDGUIPBS	IP65	Brushed Steel	72
EFDGUIPPC	IP65	Polished Chrome	72
EFDGUAWH	Adjustable	White	82
EFDGUABS	Adjustable	Brushed Steel	82
EFDGUAPC	Adjustable	Polished Chrome	82




### Product Drawing


Fixed



IP65



Adjustable

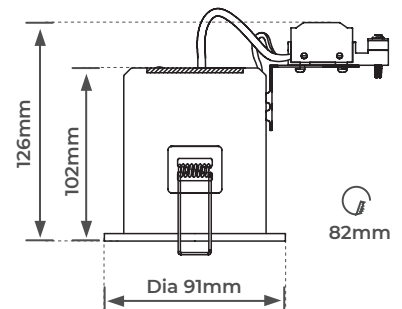

CAT NO.	WEIGHT (kg)	CEILING CUTOUT (mm)	FREQUENCY (Hz)	MAX LAMP WATTAGE	CAP TYPE	IP RATED
EFDGUFWH	0.24	72	50-60	50	GU10	20
EFDGUFBS	0.24	72	50-60	50	GU10	20
EFDGUFPC	0.24	72	50-60	50	GU10	20
EFDGUIPWH	0.3	72	50-60	35	GU10	65
EFDGUIPBS	0.3	72	50-60	35	GU10	65
EFDGUIPPC	0.3	72	50-60	35	GU10	65
EFDGUAWH	0.29	82	50-60	50	GU10	20
EFDGUABS	0.29	82	50-60	50	GU10	20
EFDGUAPC	0.29	82	50-60	50	GU10	20

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16$ A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

**LUCECO**

This luminaire is compatible with bulbs of the energy classes:

A++

A+

A

B

C

D

E

}

874/2012

