


FirestayLED


CCT 3 way selectable colour switch

Integrated LED Fixed Downlight

- 30/60/90 minutes certified firestay
- Fixed Downlight / Front CCT switch
- 6 in 1 Fixture, 3 colour temperatures, 2 bezel
- Includes satin & white magnetic bezels
- Part B / C / E compliant
- IC rated
- 7 year Guarantee (Excluding Battery)³

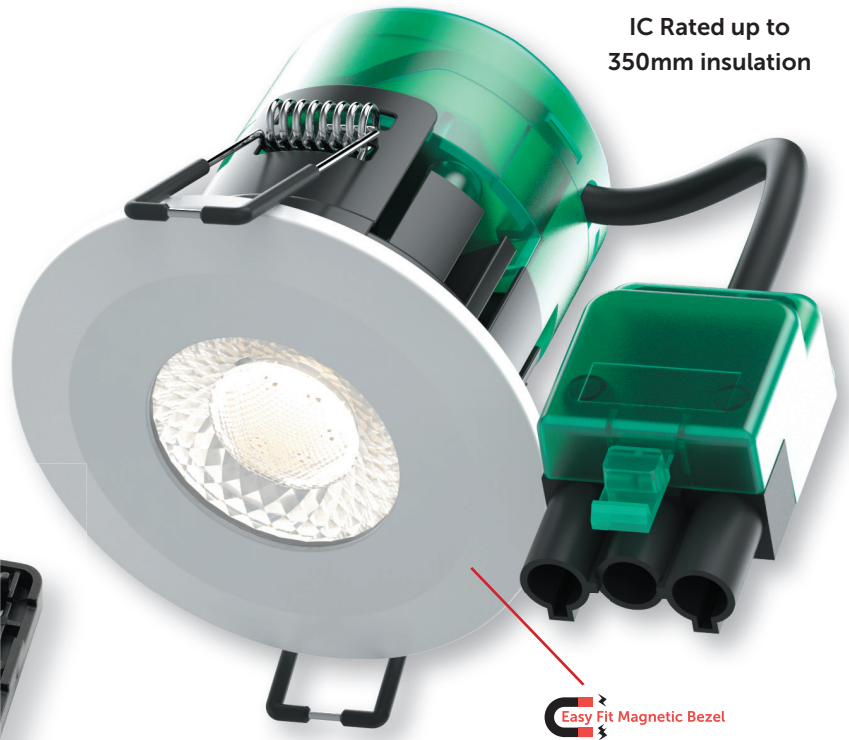


Quick Fix Connector
Tool Free Termination

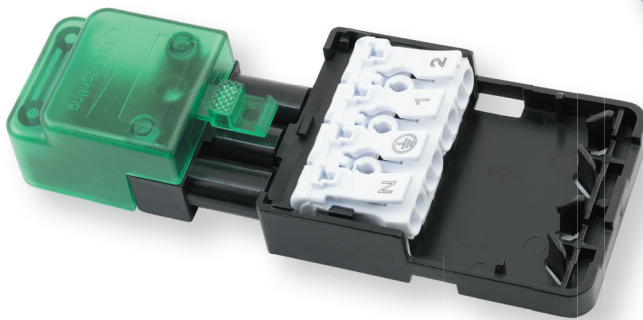


Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

Selectable Colour Temperature



3000K 4000K 6000K

Simply move the switch located under the magnetic bezel to your desired colour temperature

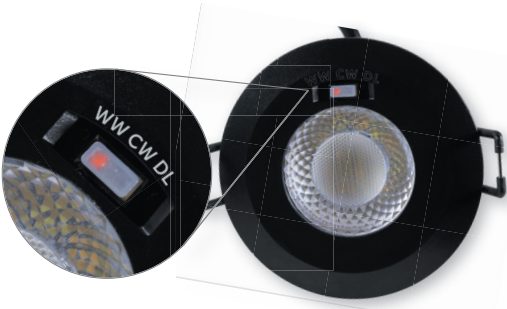


BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module:

LED Dimmable bulb - Min 5W ~ Max 100W - 10 Downlights maximum

LED Dimmable driver - Min 5W ~ Max 100W - 10 Downlights maximum
Code: 09598



British Electric Lamps Ltd
Unit A Foxbridge Way, Normanton Industrial Estate
Normanton, West Yorkshire. WF6 1TN


T: +44 (0)1924 893380 F: +44 (0)1924 894320 E: sales@belllighting.co.uk

www.belllighting.co.uk


Technical Specification

Data	
Construction	Die-Cast Aluminium
Driver	On Board
LED Chip	Epistar
IP Rating	IP65
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio


08186 / 08187 / 08190 7W

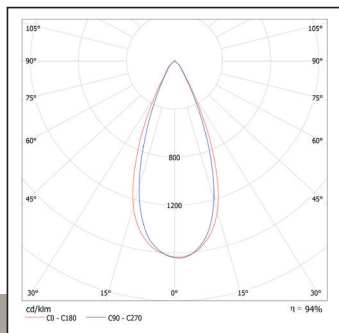

08186/08187/10510

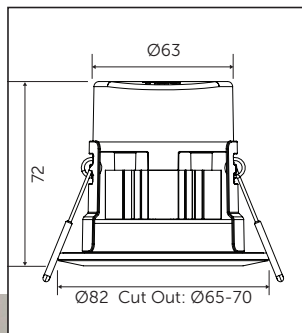

08190

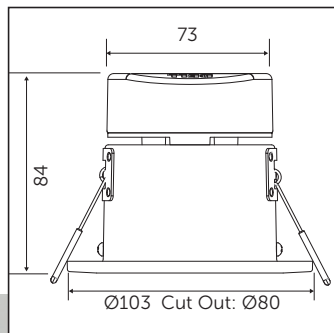

Code	Description	Colour Temperature	lm	cd	Beam ^o	Hrs
10510	7W Firestay LED CCT 3 Way Selectable Colour Switch Downlight Dimmable, Plug & Play, 40° Beam Angle. Tool Free Termination	3000K/4000K/6000K	530/550/600	530	40°	50000
10560	Chrome Magnetic Bezel for above	-	-	-	-	-
10561	Brass Magnetic Bezel for above	-	-	-	-	-
10562	Antique Brass Magnetic Bezel for above	-	-	-	-	-
10563	Matt Black Magnetic Bezel for above	-	-	-	-	-
08193	White Spacer Plate for above (100mm cut out)	-	-	-	-	-
08194	Satin Spacer Plate for above (100mm cut out)	-	-	-	-	-
08196	Emergency Pack for Firestay LED Downlights	-	-	-	-	-
09598	BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module	-	-	-	-	-



¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)