

# DATASHEET


Code: 76SS2SC-B

## Hartland | HARTLAND RANGE | Power Sockets

### Product Image




### Wiring

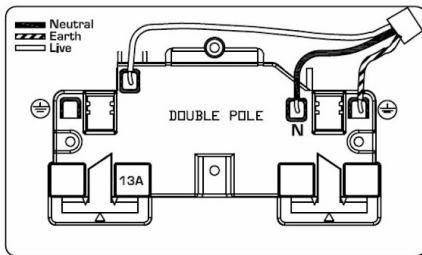

### Dimensions

**Hamilton®**  
HARTLAND  
SS2  
Switched Socket

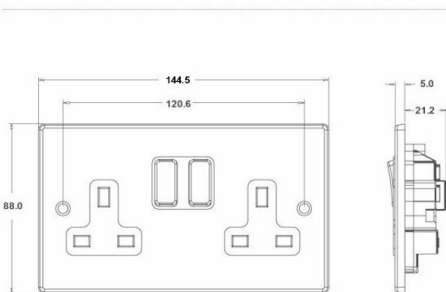

|                                      |   |
|--------------------------------------|---|
| <b>Insert Type</b>                   | 2 gang 13A Double Pole Switched Socket                |
| <b>Insert Colour</b>                 | Satin Chrome/Black                                    |
| <b>EAN13 Barcode</b>                 | 5017503266029   |
| <b>Commodity Code</b>                | 85363010  |
| <b>Luckins TSI</b>                   | 385555377   |
| <b>Dimensions(Nominal)</b>           | Double: Height = 88.0mm Width = 144.5mm Depth = 5.0mm |
| <b>Weight</b>                        | 195 GR  |
| <b>Switched Poles</b>                | Double  |
| <b>Current Rating</b>                | 13 Amp  |
| <b>Voltage</b>                       | 220/250V AC   |
| <b>Maximum Load</b>                  | 13 Amp  |
| <b>Mains Frequency</b>               | 50Hz  |
| <b>IP Rating</b>                     | IP2XD   |
| <b>Contact Gap Minimum</b>           | 3mm   |
| <b>Terminal Capacity 1</b>           | 4x2.5mm <sup>2</sup>                                  |
| <b>Terminal Capacity 2</b>           | 3x4mm <sup>2</sup>                                    |
| <b>Terminal Capacity 3</b>           | 2x6mm <sup>2</sup> Multi-Strand                       |
| <b>Terminal Capacity 4</b>           | 1x10mm <sup>2</sup>                                   |
| <b>Earth Terminal Capacity 1</b>     | 4x2.5mm <sup>2</sup>                                  |
| <b>Earth Terminal Capacity 2</b>     | 3x4mm <sup>2</sup>                                    |
| <b>Earth Terminal Capacity 3</b>     | 2x6mm <sup>2</sup> Multi-Strand                       |
| <b>Earth Terminal Capacity 4</b>     | 1x10mm <sup>2</sup>                                   |
| <b>Product Class 1</b>               | Must be earthed                                       |
| <b>Ambient Operating Temperature</b> | -5° to +40°C  |
| <b>Recommended Location</b>          | Internal Use Only                                     |
| <b>Maximum Installation Altitude</b> | 2000m   |
| <b>Standard/Approval</b>             | BS 1363-2   |
| <b>Additional Notes</b>              | Dual Earth: Yes                                       |

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 3/6/2023 5:00:22 PM E&OE