

CABINET BATTEN SWITCHABLE COLOUR 940LM 12W 2700/4000K 140 BEAM 90LM/W 870MM 3FT LINKABLE NON-DIMM INTEGRAL

ILCLB015



The Colour Switching Cabinet Batten let's you easily switch between Cool White task lighting or Warm White lighting for dining or entertaining. A three-way switch on the unit gives you direct control over the ambience of your kitchen or other under-cabinet environments, such as a study or home office. These battens are linkable, making it easier to install a series of battens in large furnishings.

Details

Quick Order Code:	602700
Barcode:	5055788241898
Category:	Luminaires
Range Name:	Colour Switching
Type:	Single
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Commercial & Industrial
Finish:	Matt White
Features:	Variable Colour Temperature
Warranty (Years):	3
CE RoHS:	Yes

Physical Data



Product Length (mm):	870
Product Depth (mm):	36
Product Width (mm):	23
Product Weight (g):	240
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Ceiling mounted
Mounting Type:	Side Conduit Entry
Placement / Application:	Indoor

Electrical Data

Power Consumption (w):	12
Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
LVD Certified:	Yes
Light Data	
Luminous Flux in Lumens (lm):	1080
Luminous efficacy (lm/W):	90
Correlated Colour Temperature (CCT) (K):	2700-4000K
Colour Temperature Name:	Warm White / Cool White
Beam Angle:	140
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	35000
Switching Cycles:	100000
Useful Lumens (lm):	1080

Environment

LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	F
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK06
IP Rating (Ingress Protection):	IP20

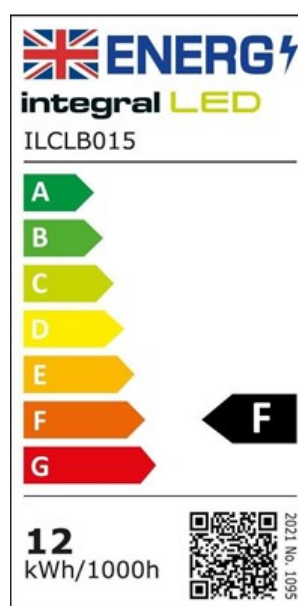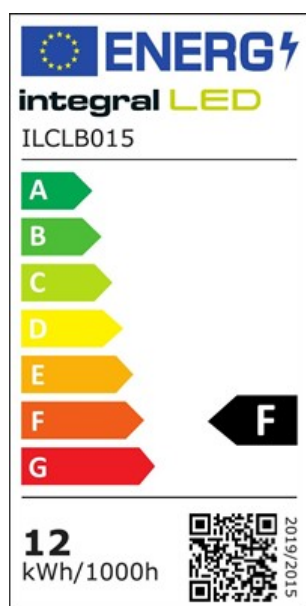

Packaging

Package Weight (g):	300	Portal.integral-led.com
Package Length (mm):	880	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm): 50
Package Depth (mm): 40