


ADDISON PRO

IMPROVED VERSION

3 CCT selectable IP40 decorative circular fitting for commercial indoor areas



AVAILABLE WITH MICRO-WAVE SENSOR FITTED



OPTIONAL TRIM AVAILABLE IN CHROME & SATIN-CHROME



APPLICATIONS

- For commercial interior use
- Particularly suitable for emergency lighting in corridors and stairwells

CONSTRUCTION


- Circular PC base
- Opal PC diffuser
- White PC trim
- LEDs on metal core PCB

TECHNICAL DETAILS

- 165 lm/W
- Available in two wattages:
 - **20W** nom., 19.8W act., 2,620 lm, 132 l.lm/c.W
 - **28W** nom., 26.8W act., 3,565 lm, 133 l.lm/c.W
- CRI >80
- CCT selectable 3000K/4000K/5000K
- Branded ENEC approved, flicker free, LED driver
- Emergency maintained 3 hours versions (suffix M3L) available, as listed

OPTIONS

- DIMMING** DD (DALI or Switch Dim) or CF (Corridor Function) available. Add suffix DD or CF as required.
- SENSOR** Available with built in micro-wave sensor. Add suffix MW
- DIMMING & SENSOR** A popular combination is corridor function & micro-wave sensor. Add suffix CFMW
- SPECIALIST EMERGENCY** Self-Test Emergency (Suffix STM3) or DALI Addressable Emergency (Suffix DAM3) options available.
- Optional trims** available in, chrome & satin chrome

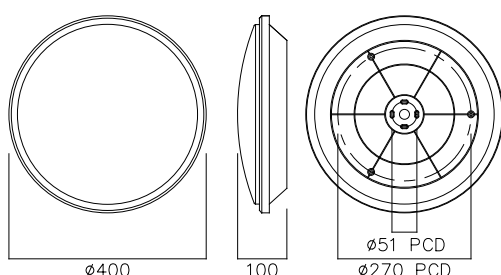

ORDER CODE	DESCRIPTION	
NAD20/WH/830-40-50	Addison PRO 20W LED IP40 White PC Base 830-840-850	
NAD20/WH/M3L/830-40-50	Addison PRO 20W LED IP40 White PC Base M3 Lithium 830-840-850	
NAD28/WH/830-40-50	Addison PRO 28W LED IP40 White PC Base 830-840-850	
NAD28/WH/M3L/830-40-50	Addison PRO 28W LED IP40 White PC Base M3 Lithium 830-840-850	
ORDER CODE	DESCRIPTION	TRIM
NAD/CH/TRIM	Addison PRO Chrome Trim	
NAD/SCH/TRIM	Addison PRO Satin Chrome Trim	