


# Technical Specification

**Product Code:** CMA30035

**Description:** 13A 1 Gang Zigbee Smart Switched Socket Outlet

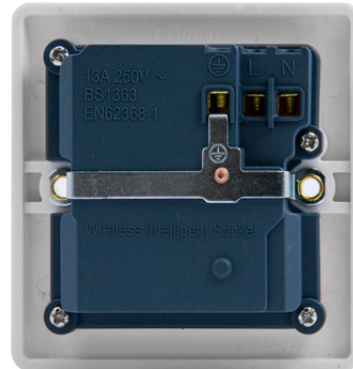

## General Information

<b>Dimensions (mm)</b>	86 (W) x 86 (H) x 9.5 (D)	
<b>Plate Fixing Centres - Horizontal (mm)</b>	60.3	
<b>Style</b>	Rounded Profile	
<b>Finish</b>	Polar White	
<b>Materials</b>	Front Plate: Urea Terminals: Brass Internal Busbars: Formed Pressed Brass	Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Electronics: PCB & Electronic Components
<b>Rated Voltage (V~) (Ue)</b>	240	<b>Frequency (Hz)</b> 50
<b>Resistive Load Rating (A)</b>	13	
<b>Termination Type</b>	Screw	
<b>Terminal Size (mm)</b>	5.7 x 4.8	<b>Terminal Torque Value (Nm)</b> 1.2
<b>Terminal Capacity - Solid (mm²)</b>	3 x 2.5 or 2 x 4	
<b>Single Pole Switched</b>	Yes	
<b>3 Pin Safety Shuttered</b>	Yes	
<b>Twin Earth Terminals</b>	No	
<b>Protocol</b>	Zigbee	<b>Signal Transmission Frequency</b> 2.4GHz
<b>Open Air Wireless Range (M)</b>	<160	
<b>Standby Current (mA)</b>	4	
<b>Indicator Colour</b>	White & Orange	
<b>Minimum Back Box Depth (mm)</b>	25	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	3	
<b>Standards</b>	BS 1363-2 BS EN 61000-6-1 BS EN 61000-6-3 BS EN 60669-2-1 in conjunction with BS EN 60669-1	

**Additional Information** 3 pin safety shutter. The shutter will only open once all three plug pins are inserted.  
Zigbee signal mesh  
Enables manual control (unless locked), wireless control and automated control  
Voice control via ClickSmart+ Hub using Alexa and/or Google Home

**Components Supplied** Smart Socket Outlet, Fixing Screws, Screw Caps, Instruction Manual

**Programming Information** With hub and app setup and socket wired and powered, press the switches for five to ten seconds, the orange LED indicator starts flashing. Can be paired with hub via app.