


ADDISON

CCT selectable IP40 decorative circular LED fitting for commercial indoor areas



CCT SELECTABLE
4000K/5000K



AVAILABLE WITH
MICRO-WAVE
SENSOR FITTED

ADDISON WITH
CHROME BODY

ADDISON WITH
WHITE BODY



SCAN FOR
DIGITAL COPY

APPLICATIONS

- For commercial interior use in corridors and stairwells
- The high light-output is designed to deliver cost effective lighting designs compliant with BS12464 and BS5266.

CONSTRUCTION

- Circular steel base
- Opal acrylic diffuser
- LEDs on metal core PCB
- Body available in White (WH) or Chrome (CH) as listed


TECHNICAL DETAILS

- 20W, 2,200 lm, 107 l.lm/c.W
- CRI >80
- CCT selectable 4000K/5000K
- ENEC approved, flicker free, LED driver
- Emergency maintained 3 hours versions (suffix M3) available, as listed
- **SENSOR** Available with built in micro-wave sensor. Suffix MW. As listed
- **DIMMING & SENSOR** A popular combination is corridor function & micro-wave sensor. Suffix CFMW. As listed

OPTIONS

DIMMING DD (DALI or Switch Dim) or CF (Corridor Function) available. Add suffix DD or CF as required.

SPECIALIST EMERGENCY Self-Test Emergency (Suffix STM3) or DALI Addressable Emergency (Suffix M3DA) options available.

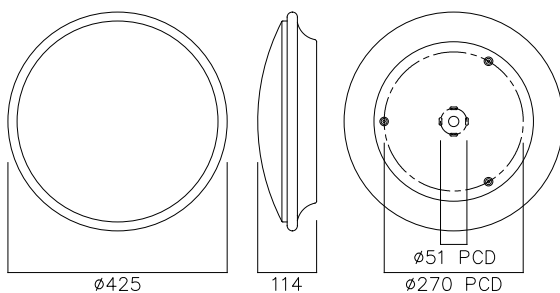

ORDER CODE	DESCRIPTION
NAD22/WH/840-850	Addison 22W LED IP40 White Base 840-850
NAD22/WH/M3/840-850	Addison 22W LED IP40 White Base M3 840-850
NAD22/WH/MW/840-850	Addison 22W LED IP40 White Base MW 840-850
NAD22/WH/MW/M3/840-850	Addison 22W LED IP40 White Base MW M3 840-850
NAD22/WH/CFMW/840-850	Addison 22W LED IP40 White Base CF MW 840-850
NAD22/WH/CFMW/M3/840-850	Addison 22W LED IP40 White Base CF MW M3 840-850
NAD22/CH/840-850	Addison 22W LED IP40 Chrome Base 840-850
NAD22/CH/M3/840-850	Addison 22W LED IP40 Chrome Base M3 840-850