


## FIRE RATED LED FIXED COMPACT DOWNLIGHT

SUPPLIED WITH MATT WHITE BEZEL

### Product Features

- **Super efficient Samsung LED chips** – Latest technology, maximum reliability
- **Clip&Fit** – Cable clamp housing for quick and easy installation
- **Speedfit** – Loop in/out push fit terminals
- **Interchangeable Bezel Accessories** – Range of colour finishes

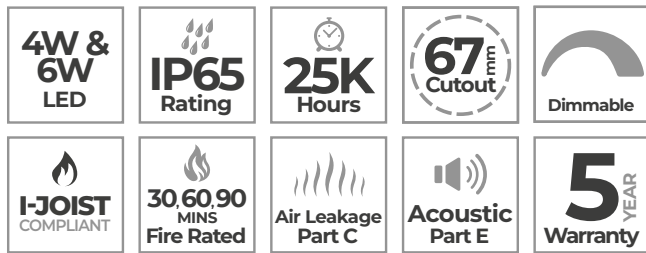

CAT NO.	LUMINAIRE LUMENS	WATTAGE	COLOUR TEMP
EFCF40W30	400	4W	3000K
EFCF40W40	400	4W	4000K
EFCF60W30	600	6W	3000K
EFCF60W40	600	6W	4000K


### Product Accessories

CAT NO.	BEZEL COLOUR	BEZEL DESIGN
EFCFBZPC	Polished Chrome	Flat
EFCFBZBS	Brushed Steel	Flat
EFCFBZBN	Black Nickel	Flat


CAT NO.	WEIGHT (g)	EFFICACY (Lm/W)	CRI	BEAM ANGLE	FREQUENCY (V/Hz)	POWER FACTOR	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
EFCF40W30	235	100	>83	60°	220-240/50-60	>0.9	25°	L70/B50
EFCF40W40	235	100	>83	60°	220-240/50-60	>0.9	25°	L70/B50
EFCF60W30	235	100	>83	60°	220-240/50-60	>0.9	25°	L70/B50
EFCF60W40	235	100	>83	60°	220-240/50-60	>0.9	25°	L70/B50

\*Supplied with Matt White

### Product Drawing

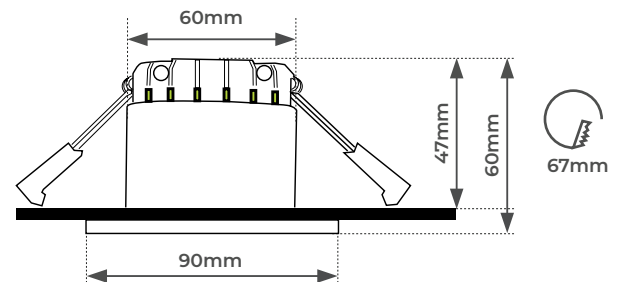

### Bezels

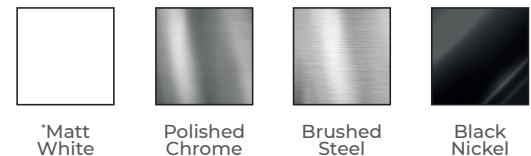


## EFCF40W40

### Luminaire Performance

Light Output Ratio: 100%  
 Luminaire Efficacy: 100lm/W  
 Light Distribution: Asymmetric  
 CIE Flux Codes: 46 76 94 99 100  
 UGR 4H 8H  
 (20%, 50%, 70%) C0 / C90: 18.8 / 18.2

### Luminous Intensity

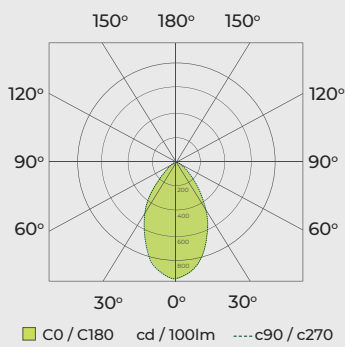


STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment



## LUCECO

 This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012

