
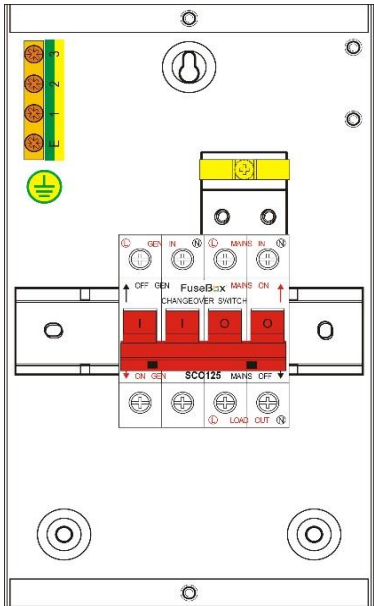
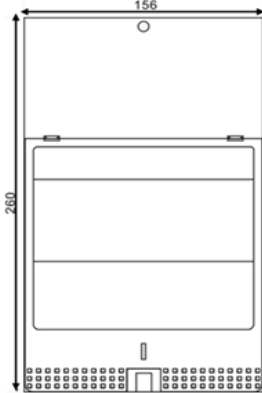
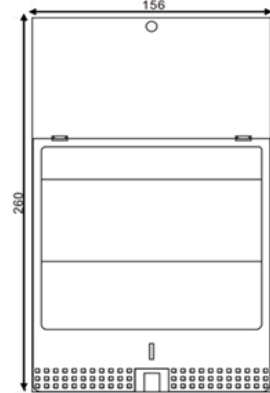
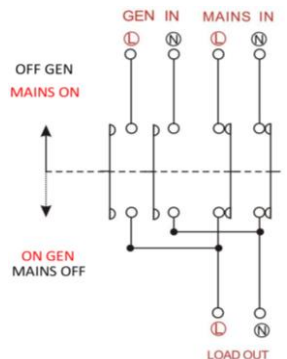
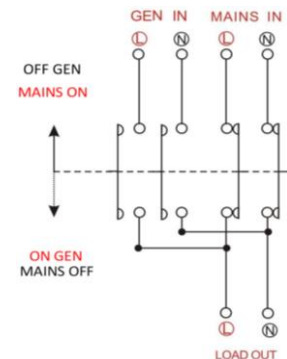


<h1 style="margin: 0;">FuseBox®</h1> <p style="margin: 5px 0;">Circuit Protection <b>SCO125</b></p>	<p style="margin: 0;">BARCODE</p> <div style="display: flex; justify-content: space-around; align-items: center;">  <div style="text-align: center;"> <p>5 060523 520527</p> </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div> </div>
---	--

PRODUCT IMAGE	DIMENSIONS
<div style="display: flex; justify-content: space-around;">   </div>	<div style="display: flex; justify-content: space-around;">   </div> <div style="text-align: center; margin-top: 20px;">  </div>

PRODUCT DATA	
<b>PART NUMBER</b>	SCO125
<b>BARCODE</b>	5060523520527
<b>DESCRIPTION</b>	125A CHANGEOVER SWITCH (1P+N)
<b>DIMENSIONS HxWxD (mm)</b>	260 x 156 x 94
<b>VOLTAGE</b>	230V/50Hz
<b>MAXIMUM LOAD</b>	125A AC22A
<b>TERMINAL CAPACITY</b>	35mm <sup>2</sup>
<b>STANDARD</b>	CU: BS EN 61439-3, CO/S: BS EN 60947-3
<b>KNOCKOUTS</b>	1x25mm + 1x32mm CONDUIT KNOCKOUTS TOP AND BOTTOM
<b>MATERIAL</b>	1mm ELECTRO GALVANISED STEEL (ZINC)
<b>FINISH</b>	SMOOTH WHITE EPOXY POWDER FINISH TO RAL9001
<b>TAILS CLAMP</b>	YES (maximum 25mm <sup>2</sup> )
<b>PADLOCKABLE</b>	YES
<b>WEIGHT (1PC) Kg</b>	2.4
<b>INNER CARTON QUANTITY</b>	1
<b>OUTER CARTON QUANTITY</b>	10
<b>ORIGIN OF MANUFACTURE</b>	CHINA



<h1 style="margin: 0;">FuseBox®</h1>	<p>sales@fusebox.co.uk</p>
--------------------------------------	----------------------------