


## **LUMINAIRES - LED LIGHT PANEL**

## EN-FPR06060

#### **Product Description:**

The E6060 $^{\text{TM}}$ , E1230 $^{\text{TM}}$  and E1260 $^{\text{TM}}$  PRO range delivers an industry leading 110lm/W, producing over 60% energy savings compared to traditional fluorescent. A superior level of construction results in an IP44 rating as standard for damp environments.

# Product Image:

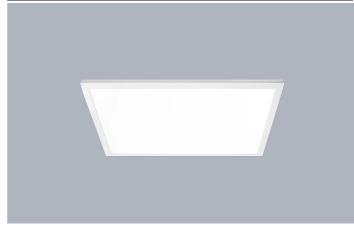


E6060™ PRO 600 x 600mm 30W LED Flat Panel


#### **Product Features:**

- Edge-lit design and optical pattern light guide engineered for even light distribution
- Suitable for installation in 15 & 24mm T-bar ceilings
- SDCM <4 providing consistent light colour quality
- IP44 rated from the front
- UGR 19 (Unified Glare Rating) suitable for use in offices
- Flicker free driver Power Factor > 0.9
- 1-10V dimmable, DALI and emergency versions available
- Surface mount box, ceiling recess box and adjustable suspension kit available
- 1.5kV surge protection
- 5 year warranty

## Line Drawing Image



#### Polar Curve Image



#### **Product Specs:**

Technology	LED	Number of LEDs	180	
Luminaire Distribution	Direct	Lifetime L70 (hrs)	50000	
Input Voltage	220~240V AC	Input Frequency	50/60HZ	
Dimmable	Yes Dali		Yes	
IP Rating	IP44	IK Rating	IK06	
Operating Env. Temp. (Min) °C	-10	Operating Env. Temp. (Max) °C	40	
Power Factor	0.9	Lamp Base	None	
Height (mm)	10	Length (mm)	595	
Width (mm)	595	Surge Protection (kV)	1.5	
SDCM	5			

#### SKU Table and Ordering

SKU Code	Wattage	Lumens	Lumens/Watt	Colour	Beam Angle	Ra	SDCM
EN-FPR06060/40	30	3300	110	4000	110	80	5
EN-FPR06060/50	30	3300	110	5000	110	80	5
EN- FPR06060DA/40	30	3300	110	4000	110	80	5
EN- FPR06060DA/50	30	3300	110	5000	110	80	5
EN-FPR06060V/40	30	3300	110	4000	110	80	5
EN-FPR06060V/50	30	3300	110	5000	110	80	5

#### Compliance & Approvals:













#### Accessories:

SKU Image	SKU Code	Description	
<b>O</b>	EN-SK100B	Panel Adjustable Suspension Kit	
	EN-LPEM2	3 Hour Non-Maintained Emergency Pack for Enlite Panel Range	
	EN-SM103B	600 x 600 x 74mm Panel Surface Mount	
	EN-CRM660A	600 x 600mm Panel Recess Mount	

### Warranty

This product has a warranty period of 5 Years.

Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Enlite Sales & Distribution Apex Park 6 Little Burrow Welwyn Garden City AL7 4SW United Kingdom

Tel: +44 (0) 1707 35 18 20